


SIDE VIEW

FRONT VIEW

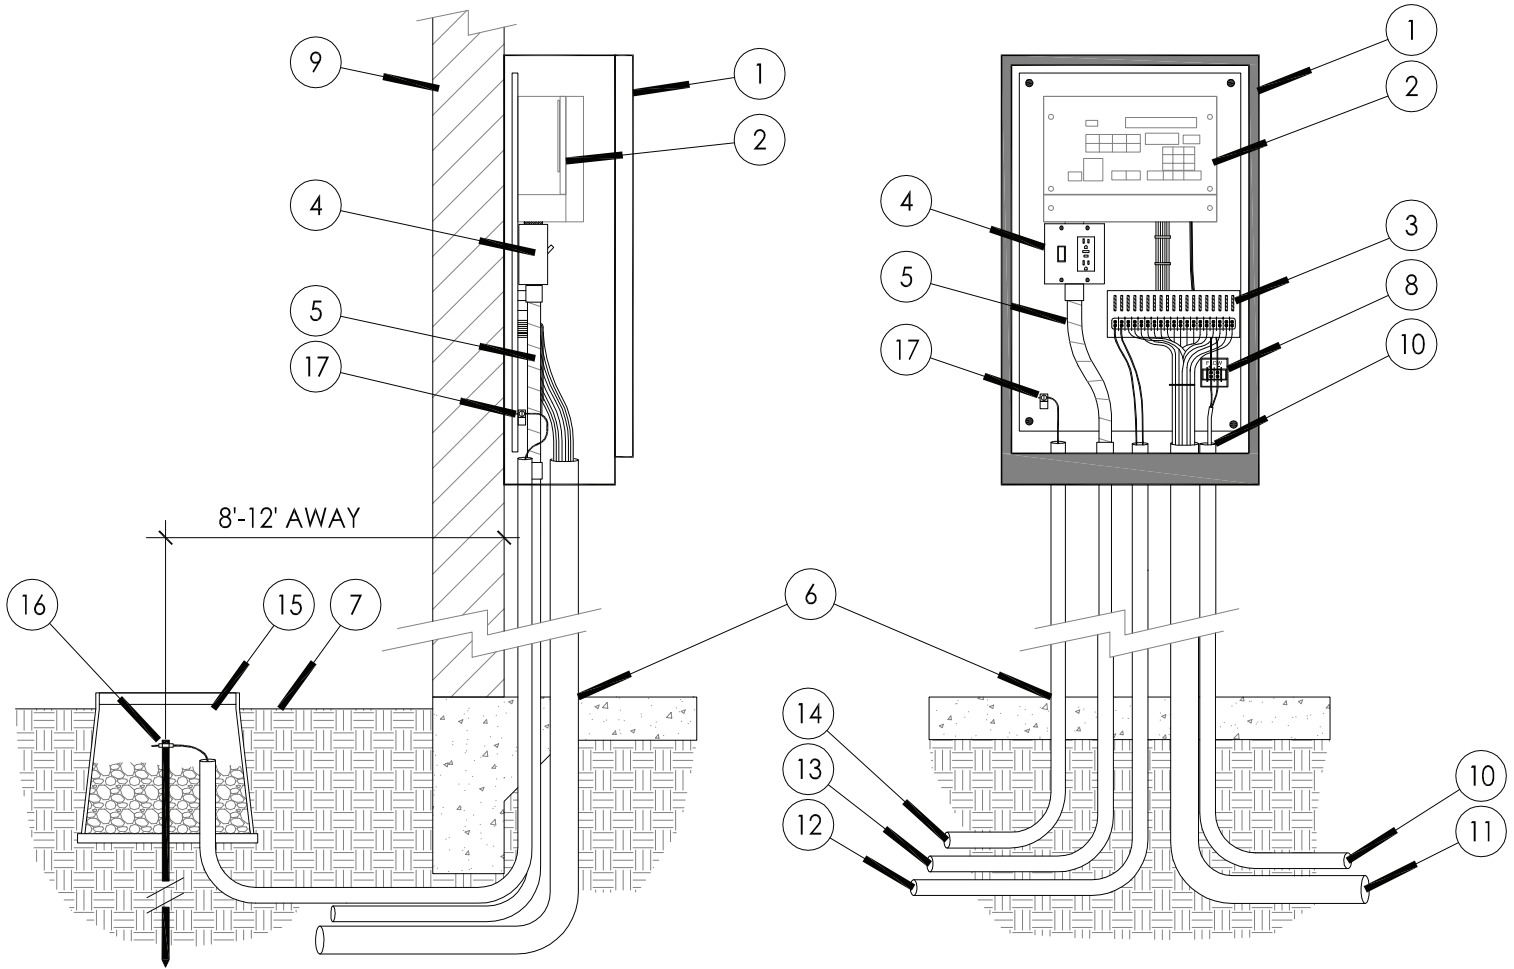

- 1 STRONGBOX STAINLESS STEEL LIGHT DUTY ENCLOSURE MOUNTED TO WALL.
- 2 CONTROLLER ASSEMBLY. ASSEMBLED ON BACKBOARD BY SITEONE GREEN TECH.
- 3 TERMINAL STRIP FOR VALVE WIRES.
- 4 POWER SWITCH / GFCI RECEPTACLE.
- 5 ELECTRICAL FLEX CONDUIT FOR POWER.
- 6 COORDINATE ALL CONDUIT RUNS THROUGH FOUNDATION FLOOR BEFORE CONCRETE POUR.
- 7 FINISHED GRADE.
- 8 FLOW SENSOR TERMINAL BOARD.
- 9 BUILDING WALL. ENSURE WALL AND ANCHORING ARE RATED FOR ENCLOSURE WEIGHT.
- 10 1" CONDUIT AND SWEEP ELL WITH FLOW SENSOR CABLE.
- 11 3" CONDUIT AND SWEEP ELL FOR LEAD WIRES.
- 12 1" CONDUIT AND SWEEP ELL FOR MASTER VALVE WIRES.
- 13 1" CONDUIT AND SWEEP ELL FOR 110 VAC POWER LINE.
- 14 1" CONDUIT AND SWEEP ELL FOR GROUND WIRE.
- 15 10" ROUND VALVE BOX AROUND GROUND ROD. FILL WITH 3/4" CRUSHED ROCK.
- 16 5/8" X 8' GROUND ROD WITH #6 GROUND WIRE AND CLAMP. LOCATE 8'-12' FROM ENCLOSURE.
- 17 #6 GROUND WIRE SECURED TO BACKBOARD GROUNDING TERMINAL.

NOTE: SEE IRRIGATION LEGEND CALL OUT FOR INCLUDED OPTIONS. SUGGESTED CONDUIT SIZES MAY NEED TO BE LARGER.

**CA12 - STRONGBOX: LD-16SW (16.75"W x 30"H x 8.25"D)
LIGHT DUTY - FRONT ENTRY WALL MOUNT ENCLOSURE**

12 CONTROLLER ASSEMBLY (CA SERIES)



TEL: [800] 427-0779
FAX: [866] 477-9873
www.greentech.siteone.com